ПРЕЗАРЕЖДАЕМА LED ЛАМПА ЗА ВРАТ
МОДЕЛ: RNL460

BG

МОНТАЖЪТ ДА СЕ ИЗВЪРШИ ОТ КВАЛИФИЦИРАН СПЕЦИАЛИСТ СЪГЛАСНО НАСТОЯЩАТА ИНСТРУКЦИЯ!
МОЛЯ, СЪХРАНЯВАЙТЕ ИНСТРУКЦИЯТА!

ИНСТРУКЦИЯ ЗА ЕКСПЛОАТАЦИЯ

RNL460 е практична и удобна LED лампа за врат. Благодарение на ергономичния си дизайн, лампата се поставя удобно около врата и осигурява hands-free осветление, без да ограничава движенията при ремонти, техническа работа, четене, плетене, ръкоделие, къмпинг, риболов, туризъм, работа в слабо осветени пространства. Създава комфорт и повишава ефективността. Двете LED глави са независимо регулируеми в обхвата 180°, което позволява светлината да се насочи точно там, където е необходима – без заслепяване и без излишно разсейване.

ТЕХНИЧЕСКА ИНФОРМАЦИЯ

Зареждащ порт	USB тип C
Мощност	4W
Батерия	Li-Ion 3.7 V DC 2600 mAh
Размери	228/150/28 mm
Тегло	179 g
Режими на работа	2W-4W-OFF
Светлинен поток	250 lm (2W) / 500 lm (4W)
Време на светене	6 часа (2W) / 3 часа (4W)
Време на зареждане	3.5 часа (5V DC/2A)
Дължина на лъча	29 m (2W) / 41 m (4W)
Интензитет	213 cd (2W) / 425 cd (4W)
IK	IK07
IP	IP65

ИНСТРУКЦИЯ ЗА БЕЗОПАСНОСТ
ВАЖНО: ПРОЧЕТЕТЕ ИНСТРУКЦИИТЕ ПРЕДИ МОНТАЖ ИЛИ ПОДМЯНА!

- Не гледайте директно в светлината по време на работа. Това може да бъде вредно за очите дори за кратък период от време поради интензивната светлина.
- Не използвайте, когато температурата е над 40° C и не зареждайте лампата под 0° C.
- Не поставяйте лампата в близост до източници на топлина или нагрети предмети. Дръжте я далеч от киселинна и алкална среда.
- Този продукт може да се зарежда и разрежда едновременно. За да се гарантира безопасна работа през това време светлината на светене трябва да бъде ограничена на 2W.
- Винаги зареждайте батериите напълно, за да осигурите най-добра производителност и живот на батерията.

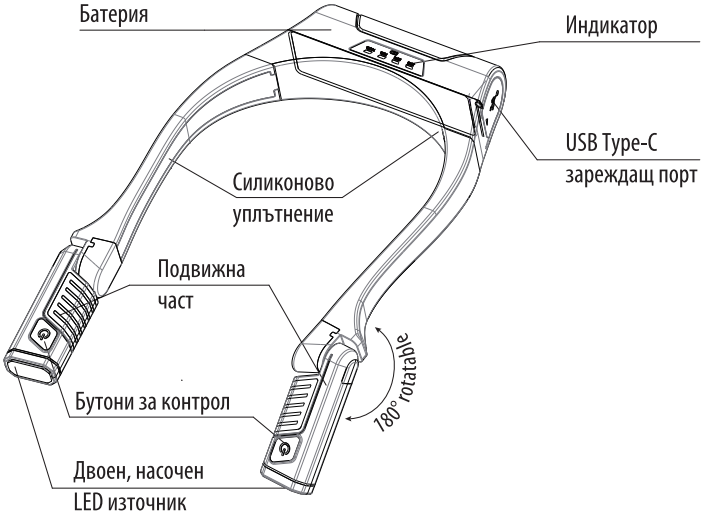

ИНСТРУКЦИИ ЗА ЗАРЕЖДАНЕ

1. Внимателно отворете и завъртете силиконовия капак на USB порта за зареждане.
2. Включете зареждащия DC адаптер към захранването.
3. Поставете зарядния кабел в порта на лампата.
4. Индикаторната сигнализация ще започне да показва процеса на зареждане.
5. Лампата е заредена, когато светнат всички индикатори.
6. Поставете отново защитния капак на зарядния порт.

ONLINE MANUAL

ЗАПАЗВАНЕ ЧИСТОТАТА НА ОКОЛНАТА СРЕДА

Продуктът и неговите компоненти не са опасни за околната среда. Моля, изхвърляйте елементите на опаковката разделно в контейнерите, предназначени за съответния материал.
Този продукт не е битов отпадък и потребителят е длъжен да го изхвърля само в контейнери за разделно събиране на излязло от употреба ЕЕО с цел опазване на околната среда и човешкото здраве.

UltraLux®

RECHARGEABLE LED NECK LIGHT
MODEL: RNL460

EN

THE INSTALLATION SHOULD BE PERFORMED BY A QUALIFIED ELECTRICIAN ACCORDING TO THIS MANUAL!
PLEASE KEEP TO THE INSTRUCTIONS!

USER MANUAL

The RNL460 is a practical and comfortable LED neck light. Thanks to its ergonomic design, the lamp fits comfortably around the neck and provides hands-free lighting without restricting movement during repairs, technical work, reading, knitting, handicrafts, camping, fishing, hiking, or working in dark spaces. Creates comfort and increases efficiency. The two LED heads are independently adjustable within a range of 180°, allowing the light to be directed exactly where it is needed – without glare and without unnecessary reflection.

TECHNICAL PARAMETERS

Charging port	USB type C
Power	4W
Battery	Li-Ion 3.7 V DC 2600 mAh
Dimensions	228/150/28 mm
Weight	179 g
Working modes	2W-4W-OFF
Luminous flux	250 lm (2W) / 500 lm (4W)
Working time	6 часа (2W) / 3 часа (4W)
Charging time	3.5 часа (5V DC/2A)
Beam length	29 m (2W) / 41 m (4W)
Light Intensity	213 cd (2W) / 425 cd (4W)
IK rate	IK07
IP rate	IP65

SAFETY INSTRUCTIONS

IMPORTANT: READ THE INSTRUCTIONS BEFORE INSTALLATION OR REPLACEMENT!

- Do not look directly into the light while operating. This can be harmful to your eyes even for a short period of time due to the intense light.
- Do not use it when the temperature is above 40°C and do not charge the lamp below 0°C.
- Do not place the lamp near heat sources or heated objects. Keep it away from acidic and alkaline environments.
- This product can be charged and discharged at the same time. To ensure safe operation during this time, the light output must be limited to 2W.
- Always charge the batteries fully to ensure the best performance and battery life.

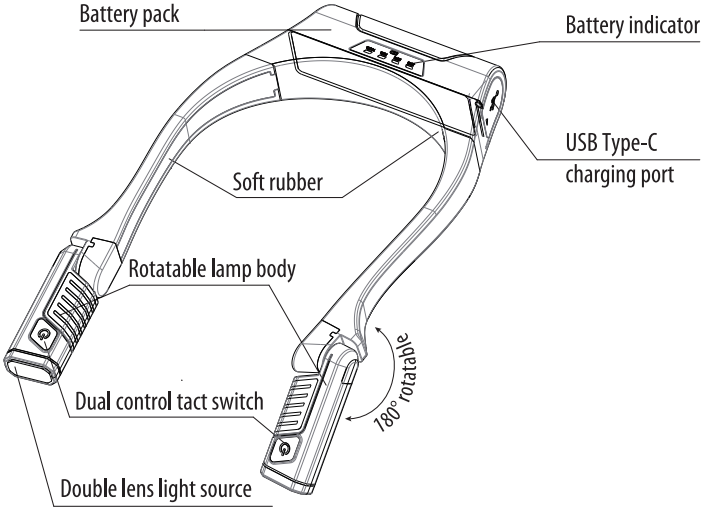

CHARGING INSTRUCTIONS

1. Carefully open and remove the silicone cover from the USB charging port.
2. Plug the DC charging adapter into the power supply.
3. Plug the charging cable into the lamp port.
4. The indicator light will begin to show the charging process.
5. The lamp is charged when all indicators light up.
6. Place the protective cover on the charging port.

TAKING CARE OF THE NATURAL ENVIRONMENT CLEANLINESS

The product and its components are not harmful to the environment. Please dispose the package elements separately in containers for the corresponding material.
Please dispose the broken product separately in containers for out of usage electrical equipment.

ONLINE MANUAL