
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

| sources  | PELEGATED REGUL    | .AITON (EU) 2019/2           | 015 with regard to energ   | gy labelling of light     |  |  |
|--|--------------------|------------------------------|--|---------------------------|--|--|
| Supplier's name  | e or trade mark:   | ULTRALUX                     |  |                           |  |  |
| Supplier's address: Boriana Ltd, Treti Mart 12, 5370 Dryanovo Gabrovo, BG  |                    |                              |  |                           |  |  |
| Model identifie  | er: SPL3B72RC-PC   | В                            |  |                           |  |  |
| Type of light so   | urce:              |                              |  |                           |  |  |
| Lighting technology used:  |                    | LED                          | Non-directional or directional:  | DLS                       |  |  |
| Light source cap-type  |                    | Type Y                       |  |                           |  |  |
| (or other electric interface)  |                    |                              |  |                           |  |  |
| Mains or non-mains:  |                    | NMLS                         | Connected light source (CLS):  | No                        |  |  |
| Colour-tuneable light source:  |                    | No                           | Envelope:  | -                         |  |  |
| High luminance light source:   |                    | No                           |  |                           |  |  |
| Anti-glare shield:   |                    | No                           | Dimmable:  | Yes                       |  |  |
|  |                    | Product para                 | T  |                           |  |  |
| Parameter  |                    | Value                        | Parameter  | Value                     |  |  |
|  |                    | General product              | T  | I                         |  |  |
| Energy consumption in on-<br>mode (kWh/1000 h), rounded<br>up to the nearest integer   |                    | 64                           | Energy efficiency class  | D                         |  |  |
| Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |                    | 8 000 in Wide<br>cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 30006500                  |  |  |
| On-mode power (P <sub>on</sub> ), expressed in W   |                    | 64,0                         | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,00                      |  |  |
| Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal                                |                    | <del>-</del>                 | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 80                        |  |  |
| Outer dimensions without separate control gear, lighting control   | Height Width Depth | 480<br>480<br>85             | Spectral power distribution in the range 250 nm to 800 nm, at full-load  | See image<br>in last page |  |  |

| parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre) |       |  |                |  |  |  |
|--|-------|--|----------------|--|--|--|
| Claim of equivalent power <sup>(a)</sup>                                   | -     | If yes, equivalent power (W)                                       | -              |  |  |  |
|  |       | Chromaticity coordinates (x and y)                                 | 0,379<br>0,376 |  |  |  |
| Parameters for directional light sources:                                  |       |  |                |  |  |  |
| Peak luminous intensity (cd)   | 2 300 | Beam angle in degrees, or the range of beam angles that can be set | 120            |  |  |  |
| Parameters for LED and OLED light sources:                                 |       |  |                |  |  |  |
| R9 colour rendering index value  | 5     | Survival factor  | 1,00           |  |  |  |
| the lumen maintenance factor   | 0,96  |  |                |  |  |  |

(a)'-': not applicable; (b)'-': not applicable;

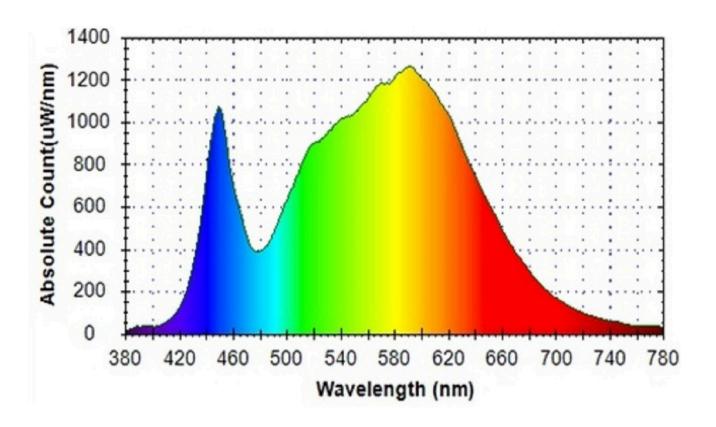

Model placed on the Union market from 04/09/2024.



**EPREL registration number:** 1984247 https://eprel.ec.europa.eu/qr/19

84247

Supplier: BORIANA LTD (Importer) Website: ULTRALUX.BG

**Customer care service:** 

Name: Boriana Ltd Website: ultralux.bg

Email: sales@ultralux.bg Phone: +35967674433

Address: Treti Mart 12 5370 Dryanovo

Bulgaria